Flashing tutorial

(Applicable models: Francais G1)

1. Download and Unzip Firmware and Flash Tool

- 1) Click the link below to download the "G1-FR-V3.02-20241011" file from Google driver. https://drive.google.com/file/d/16x3j7FqSPv4NS2AsbdJ-U5I2Vfh_CIVb/view?usp=drive_link
- 2) Unzip the downloaded "G1-FR-V3.02-20241011", you will get the following 3 files.
 Download the whole file and then unzip it! It won't work without unzipping! If you don't have an unzip tool, download https://www.win-rar.com/ or other unzipping tool.

- How to unzip: Right mouse click on the file and select Unzip.

After unzipping you will see the following files:

- Flash Tool: Named "SP_Flash_Tool_exe_Windows_v5.1904"
- Firmware: Named "MX3W_FR-V3.02-20241011"
- Tutorial Video: Named "Flashing tutorial"

Name	Date modified	Туре	Size
MX3W_FR-V3.02-20241011	10/16/2024 11:05 AM	File folder	
SP_Flash_Tool_exe_Windows_v5.1904	8/7/2024 1:57 PM	File folder	
🕞 Flashing tutorial.mp4	8/7/2024 5:07 PM	MP4 File	25,569 KB

2. Run and Configure Flash Tool

1) In the flash tool folder, find and double-click "Flash_tool.exe" to run it.



Smart Phone Flash Tool (Runti ile Options Window Help	e Trace Bode)
	Yglcome Forngt Rovnload Beadback Menory Test
вм	Domload Stop
	Download-Agent
	Scatter-loading File
MediaTek	Authentication File
	Download Only
	V Name Begin Address End Address Location
	0 B/s 0 Bytes High Speed 0:00 USB: DA Download All (high speed, auto detect)

Note: After unzipping, the "Flash_tool.exe" file may be mistakenly deleted because it is judged as an unknown source file by the Windows Security Center or third-party security software. If so, please temporarily turn off Windows protection detection or third-party security software before unzipping. You can also set Flash_tool.exe as a trusted program in Windows protection detection or third-party security software.For win10, please visit Settings>>Update and Security>>Windows Security Center>>Virus and Threat Protection, find "Protection History", then find "Flash_tool.exe" and restore it.

2) Find the "Download" tab in the flash tool window, and click the button "choose" on the right side of the "Download-Agent" input box, then find "MTK_AllInOne_DA.bin" in the flash tool folder and choose to open it. As follows:

Options Window H	lelp					
	Welcor	me Format Download Readback	Memory Test			
_						
	1	Download Stop				_
		load-Agent				choose
	Scat	ter-loading File			~	choose
MediaTel	Auth	entication File			~	choose
leurarer	Down	aload Only 💌				
		Name Begin Address End Address		Location		
				/		
)pen Download Agent File	e		/			×
	. T# . C1	-Francais > SP Flash Tool exe Windows	u5 1004	✓ C 在 S	SP_Flash_Tool_exe_Wi	٥
	> P32 > GI-	mancais / sr_nasi_roor_cxc_windows	_0.1504 7			
只▼ 新建文件夹	, Max , GI-				≣ ▼ □	0
२▼ 新建文件夹	, 1 ₂₀ , 01-	名称	修改日期	类型		·
?▼ 新建文件夹					≣ • 🛄	·
R ▼ 新建文件夹 ● 黄 - 个人		名称			≣ • 🛄	·
 新建文件夹 新 - 个人 ▲ 桌面 	*	名称 ×上月	修改日期	类型	≣ • 🛄	·
R▼ 新建文件夹 ● 董 - 个人 ■ 桌面 ↓ 下载	*	谷称 ◇上月 ■ codecs	修改日期 2024/8/7 18:03	类型文件夹	≣ • 🛄	·
 マ 新建文件夹 ★ - 个人 ▲ 眞面 ↓ 下戦 → ζ档 	* * *	名称 ✓上月 ■ codecs ■ imageformats	修改日期 2024/8/7 18:03 2024/8/7 18:03	美型 文件夹 文件夹	≣ • 🛄	·
 マ 新建文件夹 ★ - 个人 ▲ 眞面 ↓ 下戦 → ζ档 	*	名称 ✓上月 ■ codecs ■ imageformats ■ sqldrivers	修改日期 2024/8/7 18:03 2024/8/7 18:03	美型 文件夹 文件夹	≣ • 🛄	•
 マ 新建文件夹 斎 - 个人 夏面 ↓ 下戦 ③ 文档 ③ 欧片 	* * *	≤称 ✓ 上月 ■ codecs ■ imageformats ■ sqldrivers ✓ 很久以前	修改日期 2024/8/7 18:03 2024/8/7 18:03 2024/8/7 18:03	类型 文件夹 文件夹 文件夹	▼ ■ 大小 ■	•
 R → 新建文件共 斎 董 - 个人 二 「 「 転 二 「 下 転 二 文档 ① 置 乐 	* * * *	名称 ✓ 上月 ■ codecs ■ imageformats ■ sqldrivers ✓ 很久以前 ■ DA_PL.bin	修改日期 2024/8/7 18:03 2024/8/7 18:03 2024/8/7 18:03 2024/8/7 18:03 2019/2/1 11:38	業型 文件来 文件来 文件来 文件来 BIN 文件	★小 12,534 KB	•
 R → 新建文件共 斎 董 - 个人 二 「 「 転 二 「 下 転 二 文档 ① 置 乐 	# # # #	名称 ✓ 上月 ■ codecs ■ imageformats ■ sqldrivers ✓ 很久以前 ■ DA_PL.bin ■ DA_PL.CRYPTO20.bin	修改日期 2024/8/7 18:03 2024/8/7 18:03 2024/8/7 18:03 2024/8/7 18:03 2019/2/1 11:38 2019/2/1 11:38	 类型 文件夹 文件夹 文件夹 BIN 文件 BIN 文件 	大小 12,534 KB 12,534 KB	•
 新建文件共 董 - 个人 桌面 下載 文档 图片 2 預販 	# # # #	名称 ✓ 上月 ■ codecs ■ imageformats ■ sqldrivers ✓ 很久以前 ■ DA_PL.bin ■ DA_PL.Din ■ DA_PL.CRYPTO20.bin ■ DA_SWSEC.bin	修改日期 2024/8/7 18:03 2024/8/7 18:03 2024/8/7 18:03 2024/8/7 18:03 2019/2/1 11:38 2019/2/1 11:38 2019/2/1 11:38	 美型 文件夹 文件夹 文件夹 文件夹 BIN 文件 BIN 文件 BIN 文件 	大小 12,534 KB 12,534 KB 3,962 KB	•
 新建文件夹 新建文件夹 董 - 个人 桌面 下载] 文档 ④ 四片 ④ 音乐 2 视频 查 春服 	# # # #	名称 ✓ 上月 ■ codecs ■ imageformats ■ sqldrivers ✓ 很久以前 ■ DA_PLbin ■ DA_PLCRYPTO20.bin ■ DA_SWSEC_CRYPTO20.bin ■ DA_SWSEC_CRYPTO20.bin	修改日期 2024/8/7 18:03 2024/8/7 18:03 2024/8/7 18:03 2024/8/7 18:03 2019/2/1 11:38 2019/2/1 11:38 2019/2/1 11:38 2019/2/1 11:38	类型 文件来 文件来 文件来 文件来 日N 文件 BIN 文件 BIN 文件 BIN 文件 BIN 文件	大小 12,534 KB 12,534 KB 3,962 KB 3,962 KB	•
 新建文件表 第建 个人 第 - 个人 桌面 下载 文档 図片 音乐 額別 音乐 額別 音乐 2 初期 客服 客服 宮田和墨本 	# # # #	名称 < 上月 Codecs imageformats sqldrivers < 很久以前 DA_PLbin DA_PLCRYPTO20.bin DA_SWSEC.Bin DA_SWSEC.CRYPTO20.bin MTK_AllInOne_DA.bin	修改日期 2024/8/7 18:03 2024/8/7 18:03 2024/8/7 18:03 2024/8/7 18:03 2019/2/1 11:38 2019/2/1 11:38 2019/2/1 11:38 2019/2/1 11:38	 美型 文件夹 文件夹 文件夹 BIN 文件 BIN 文件 BIN 文件 BIN 文件 	大小 12,534 KB 12,534 KB 3,962 KB 3,962 KB	·

3) Click the button "choose" on the right side of the "Scatter-loading File" input box, then find "MT6753_Android_scatter" in the firmware folder and choose to open it. As follows:

Options Window He	elp							
	Wel	ome Format	Download Read	oack Memo	ry Test			
iM.		J ownload	O Stop					
		vnload-Agent atter-loading File		\Downloads\(H-Francais\SP_Flash_T	ool_exe_Windows_v	5.1904\MTK_AllInOne_DA	bin 📄 choose
MediaTek	Au	thentication File						choose
	μo	wnload Only Name Begin A	_ _ ddress End Add	ress		Location		
Open Scatter File					/			×
> · · ↑ 🚬 >	下载G	1-Francais > MX	3W_FR-V3.00-202	40418		~ C 4	E MX3W_FR-V3.00-202	4 , P
目织 ▼ 新建文件夹				/			≣ .	
📥 黄 - 个人		名称	*		修改日期	类型	大小	
三 桌面	*	◇ 今年的早些 MT6753_4	时候 Android_scatter		2024/4/18 20:21	文本文档	12 KB	
业 下载	*	-						
三 文 档	*							
🔀 图片	*							etect)
🕖 音乐	*							
🔀 视频	*							
こう 客服								
言 客服						× 1		
								-
	-	Android_scatter						1000

4) Click and select the "Format All + Download" option in the flash type drop-down box. As shown below:


	Welcome Form	at Download Rea	dback Memory Test			
M	Download	© Stop				
	Download-Agen	t ris77\Download	s\G1-English\G1-English	\SP_Flash_Tool_exe_Windo	ws_v5. 1904 \MTK_AllInOne_DA. bin	choose
	Scatter-loadin	ng File C:\Users\Dori:	s77\Downloads\G1-English	\G1-English\MX3W_EN-V2.	06-20240418\MT6753_Android_s 🗸 📒	choose
	Authentication	File				choose
MT6753	Format All + 1		oct Format A	ll + Download		choose
	Format All +	Download				
	Firmware Upgr Download Only		End Address	Region	Location	_1
	Statement Sectors	Contraction and the second sec	and a second	Internet part Matter and an and the second second	C:\Users\Doris77\Downloads\G1-Er	
	🖸 lk		0 0x0000000030d859f		C:\Users\Doris77\Downloads\G1-Er	
a 🗖 🕤	oot 🖸		0 0x000000003943d27	-	C:\Users\Doris77\Downloads\G1-Er	
	recovery	0x00000000418000	0 0x000000004cf8d2b	EMMC_USER	C:\Users\Doris77\Downloads\G1-Er	h
	🕑 logo	0x00000000598000	0 0x0000000059ef22f	EMMC_USER	C:\Users\Doris77\Downloads\G1-Er	
	🕑 secro	0x000000006e0000	0 0x00000006e20fff	EMMC_USER	C:\Users\Doris77\Downloads\G1-Er	h
	🕑 tee1	0x00000007c0000	0 0x000000007c0fdff	EMMC_USER	C:\Users\Doris77\Downloads\G1-Er	
	🛃 tee2	0x00000000810000	0 0x0000000810fdff	EMMC_USER	C:\Users\Doris77\Downloads\G1-Er	
	🕑 lk2	0x0000000860000	0 0x00000000865859f	EMMC_USER	C:\Users\Doris77\Downloads\G1-Er	
	🖸 odmdtbo	0x00000000c78000	0 0x00000000c78c32f	EMMC_USER	C:\Users\Doris77\Downloads\G1-Er	t
	vendor	0x000000000d80000	0 0x00000000202acc5b	EMMC_USER	C:\Users\Doris77\Downloads\G1-En	
	system	0x00000002980000	0 0x000000011309530f	EMMC USER	C:\Users\Doris77\Downloads\G1-Er	h
	-					

3. Flash G1 player


1) Click the button "Download". The update tool will be waiting for the device to connect.

	elcome Form	n <u>a</u> t <u>D</u> ownload <u>F</u>	eadback Memory <u>T</u>	est		
	-					
	Download	Stop				
		Click i	24			
	Download-Agen	t C:\Users\Ad	ministrator\Desktop	\Innioasis G1 Fla	sh\FlashTool\MTK_AllInOne_DA. bin	Choose
	Scatter-loadi:	ng File C:\Users\Ad	ministrator\Desktop	\Innioasis G1 Fla:	sh\Firmware_V1.17\MT6753_Android_scatter. 💌	😑 choose
					-	
MT6753	Authenticatio	n File			<u>ت</u>	Choose
	Format All +	Download 💌				
	🔽 Name	Begin Address	End Address	Region	Location	
	🗹 preloader	0x0000000000000000000000000000000000000	0x000000000026еЪЪ	EMMC_BOOT1_BOOT2	C:\Users\Administrator\Desktop\Innioasis G1	Flam
	🗹 1k	0x0000000001 c80000	0x0000000001 cdbb6 f	EMMC_USER	C:\Users\Administrator\Desktop\Innioasis G1	Fla
a 🗂 🖘	🖌 boot	0x000000001480000	0x0000000002531527	EMMC_USER	C:\Users\Administrator\Desktop\Innioasis G1	Flam
	🖌 recovery	0x000000002480000	0x0000000038e652b	EMMC_USER	C:\Users\Administrator\Desktop\Innioasis G1	Fla
	🖌 logo	0x000000004580000	0x0000000004616def	EMMC_USER	C:\Users\Administrator\Desktop\Innioasis G1	Fla
	🖌 secro	0x000000005+00000	0x000000005a20fff	EMMC_USER	C:\Users\Administrator\Desktop\Innioasis G1	Flam
	🗹 teel	0x000000006800000	0x00000000680fdff	EMMC_USER	C:\Users\Administrator\Desktop\Innioasis G1	Fla
	🗹 tee2		0x00000000640£4££		C:\Users\Administrator\Desktop\Innioasis G1	Flam
	✓ 1k2	0x000000007200000	0x00000000725bb6f	EMMC_USER	C:\Users\Administrator\Desktop\Innioasis G1	
	🗹 odmdtbo		0x000000000b38c0cf		C:\Users\Administrator\Desktop\Innioasis G1	
	V vendor		0x000000001 f2abc5b		C:\Users\Administrator\Desktop\Innioasis G1	
	🗹 system	0x000000028800000	0x00000000cb70aaff	EMMC_USER	C:\Users\Administrator\Desktop\Innioasis G1	Fla 👻

2) Next, turn off G1 player and connect it to your computer with the supplied USB-C cable. The update tool will automatically recognize the connected device and start formatting and updating the firmware. You can see the percentage of completion through the color progress bar below, until 100% complete.

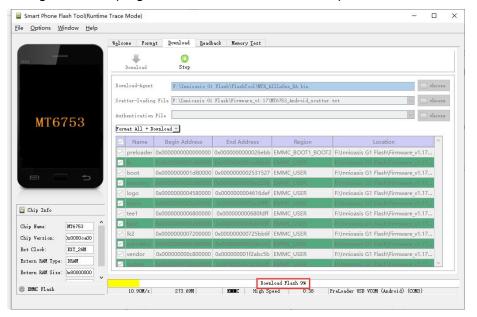

Once done, the flashing tool will pop up a prompt. As shown below

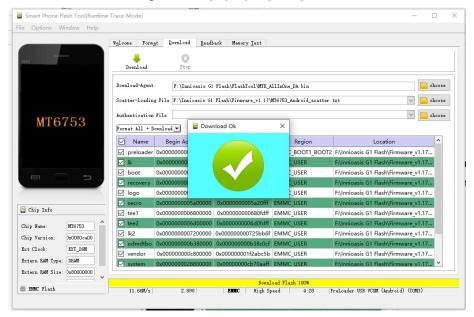

Note:

Please make sure that the G1 player is turned off and then connected to the computer, otherwise it will not be able to flash normally.

If there is no response from the progress bar after connecting to the computer, it means that the Flash tool does not recognize the G1 player. Most cases are caused by the lack of the correct MTK USB driver on the computer.

If you are win10 or win11, please download the following driver on your computer and try again. https://www.wooabc.cn/download/MTPUSBDriverForWin10.rar If you have other versions of Windows, please contact us for the corresponding driver.

At this point, the firmware update is complete.

For more help or to schedule a remote assistance appointment, please contact us via email and we will get back to you as soon as possible. Online support: innioasis-csc@hotmail.com